



TRUTEKTM
CONSTRUCTION FASTENING SYSTEMS



PRODUCT CATALOGUE 2025





CERTIFICATE

PCC-CERT

confirms, that:

Trutek Fasteners Polska Sp. z o. o.
ul. Wojska Polskiego 3, 39-300 Mielec

applies to the Integrated Management System and fulfills requirements of:

PN-EN ISO 9001:2015
PN-EN ISO 14001:2015

in scope of:

sales of assembly and anchoring systems for construction and industry.

Date of the certification decision: 22.02.2024
Certificate validity: 22.02.2024-21.02.2027
Certificate registration No.: PW-06002-24

PCC Manager

Mirosław Błaut



AC 082

Kobierzyce, 03.06.2024

The certificate remains valid upon fulfilling requirements of contract agreement No. 743/2023
PCC-CERT Group Sp. z o.o. ul. Sportowa 29, 55-040 Kobierzyce

CONTENTS	4
BATTERY NAILERS	5
GAS & PAT TECHNOLOGY	6 - 9
MECHANICAL ANCHORS	10 - 17
CHEMICAL & ACCESSORIES	18 - 20
LIGHTWEIGHT ANCHORS	22 - 25
CARBIDE DRILLING	26-27
TESTING EQUIPMENT	28-30
POWER TOOLS	32-33
BRANDING	34

- Full Application
- Limited Use
- ◆ Technical approval

Pg	Product
----	---------

BASE MATERIAL

FASTENING TYPE

[illegible]

18	TCM - Chemical Cartridge Anchors
19-20	TCA - Chemical Accessories

[illegible]

22	TSK - Strike anchors
20	TZH Zamac Hammer-In Anchor
23	TKS - Tapscrews
24	TBB -Blue Banger
25	TDPA - Metal Plasterboard Anchor
25	TNPA - Nylon Plasterboard Anchor
25	TNDT - Nylon Drywall Toggle
25	TZDT - Drywall Zip Toggle



WHO ARE WE?

Trutek Fasteners is a part of an international holding group that includes production and trading companies operating in all parts of the world. Its distribution activity in Europe began in the United Kingdom in January 2002. Our company specialises in the production of top quality fastening systems for construction and industry. In our wide range, you will find both traditional products, used for many years in construction industry, and innovative, technologically advanced solutions that guarantee the highest level of safety, as well as easy and prompt application.

TOP QUALITY OF PRODUCTS - TECHNICAL APPROVALS, CERTIFICATES AND TESTS

Our products are subject to strict and demanding quality control that ensures the highest quality of the products and complete safety of their use. This is confirmed by numerous certificates and technical approvals.

FAST AND COMPLETE DELIVERIES

- Stock on hand. Advanced SAP computer system enables us to manage warehouse stock accurately and prevent product shortage.
- Prompt order execution. Orders from our Customers, regardless of the way of their submission, are immediately passed on for execution, so we guarantee delivery within 24 hours from ordering.
- Complete delivery information. The integration of our computer system with the shipment system of the forwarding company makes it possible to track the process of shipment online and predict the time of delivery.
- Delivery completeness. The process of the execution of orders involves checking mechanisms that provide multi-level inspection of delivery completeness, thus limiting possible mistakes.

TRAINING

Comprehensive program of trainings for our Commercial Partners is aimed to the best preparation of their personnel to serve Customers from the construction industry. The training program includes the following issues:

- Product training - it gives the opportunity to get fully familiar with our products, their technical characteristics and application in construction side conditions.
- Technical training – it includes expertise in the range of materials science, physical and chemical processes that occur during anchoring and product documentation required on construction sites, such as technical approvals, certificates and declarations of conformity.

TECHNICAL ASSISTANCE, ADVISING ON CONSTRUCTION SITES

Technical assistance is provided by a group of experts whose mission is to support design engineers and constructors in cases of innovative and difficult construction projects, as well as the optimum and complex choice of fastenings for typical applications that are common for constructions sites:


- telephone info-line technical support,
- choice of fastenings for a given project,
- anchors choice reports,
- materials for design engineers,
- anchors choice program,
- construction site test and presentations

ORDER PORTAL - ONLINE ORDERING

This is easy and fast way for purchasing at any time of the day and night. All the orders placed on the Internet retain all commercial conditions, and the interactive interface of information exchange gives the opportunity to agree non-standard conditions of product delivery.

- information on the availability of product of interest,
- information on the order value,
- information on the order processing progress;
- invoice prior to product delivery,
- special offers for web portal users,
- historical data review,
- waybill number, enabling the Customer to track the process of goods delivery

TBT CONCRETE NAILERS



(TOOL SUPPLIED COMPLETE IN A PACKING CASE)

Product Code	Energy Level (J)	Magazine Capacity (pcs)	Nail Length	Tool Weight (lbs)	Battery Life
TBT27 TRAK TOOL	120	30	1/2" up to 1"	7.6	750 shots
TBT40 CONCRETE NAILER	120	40	1/2" up to 1-5/8"	7.7	750 shots



Premium Magazine Nails for Gas Nailer

(fixing in concrete and Steel)



Product Code	Base Material	Nail Diameter (")	Nail Length (mm)	For Use With	Box Packing	Outer Packing
TGT15P	Steel	5/16" / 1/4"	5/8"	TGT C38	1000	5000
TGT19P	Steel	5/16" / 1/4"	3/4"	TGT C38	1000	5000
TGT22P	Steel/Concrete/Brick	5/16" / 1/4"	7/8"	TGT C38	1000	5000
TGT25P	Steel/Concrete/Brick	5/16" / 1/4"	1"	TGT C38	1000	5000
TGT32P	Steel/Concrete/Brick	5/16" / 1/4"	1-1/4"	TGT C38	1000	5000
TGT38P	Steel/Concrete/Brick	5/16" / 1/4"	1-1/2"	TGT C38	1000	5000




Steel washers for Gas Nailer

Product Code	Description	Washer Diameter(")	Box Packing	OuterPacking
TGA825MW	Steel washer for Gas Tool	1"	200	3600



TBTW FRAMING NAILER



(TOOL SUPPLIED COMPLETE IN A PACKING CASE)

Product Code	Energy Level (J)	Magazine Capacity (pcs)	Nail Length	Tool Weight (lbs)	Battery Life
TBTW34 FRAMING NAILER	120	50	up to 3-1/2"	8	750 shots



TBT INSULATION NAILERS



(TOOL SUPPLIED COMPLETE IN A PACKING CASE)



TBT & PAT TECHNOLOGY

Product Code	Energy Level (J)	Magazine Capacity (pcs)	Insulation Thickness (")	Tool Weight (lbs)	Battery Life
TBTIS4 INSULATION NAILER	120	-	up to 4"	7.5	750 shots
TBTIS6 INSULATION NAILER	120	-	up to 6"	7.55	750 shots

Insulation Anchor for Styrofoam & hard Rockwool

(2-3/8" collar)



Product Code	Type of Substrate Material	Insulation Thickness (")	Nail Length	Box Packing	OuterPacking
TIF60050	Concrete/Steel/Brick	2"	2"	500	16000
TIF60060	Concrete/Steel/Brick	2-3/8"	2"	500	16000
TIF60070	Concrete/Steel/Brick	2-3/4"	2"	500	16000
TIF60080	Concrete/Steel/Brick	3-1/4"	2"	500	16 000
TIF60100	Concrete/Steel/Brick	4"	2"	450	14 400
TIF60120	Concrete/Steel/Brick	5"	2"	400	12 800
TIF60140	Concrete/Steel/Brick	5-1/2"	2"	300	9 600
TIF60150	Concrete/Steel/Brick	6"	2"	300	9 600
TIF60160	Concrete/Steel/Brick	6-1/4"	2"	250	8 000
TIF60180	Concrete/Steel/Brick	7"	2"	250	8 000
TIF60200	Concrete/Steel/Brick	8"	2"	200	6 400

Suitable for: Trutek TGT IS200 and LV600M

Insulation Anchor for soft Rockwool Fixing

(3-1/2" collar)



Product Code	Type of Substrate Material	Insulation Thickness (mm)	Nail Length	Box Packing	OuterPacking
TIF90080	Concrete/Steel/Brick	3-1/4"	2"	250	8 000
TIF90100	Concrete/Steel/Brick	4"	2"	250	8 000
TIF90120	Concrete/Steel/Brick	5"	2"	200	6 400
TIF90140	Concrete/Steel/Brick	5-1/2"	2"	200	6 400
TIF90150	Concrete/Steel/Brick	6"	2"	150	4 800
TIF90160	Concrete/Steel/Brick	6-1/4"	2"	150	4 800
TIF90180	Concrete/Steel/Brick	7"	2"	100	3 200
TIF90200	Concrete/Steel/Brick	8"	2"	100	3 200

Suitable for: Trutek TGT IS200

POWDER ACTUATED TOOLS



Product Code	Cartridge Calibre	Head Diameter (")	Tool Weight (lbs)	Nail Length (")	Tool Length (")
LV350	6.8/11 (Strip)	0.300	5,1	3"	14"
LV370P	0.22 Calibre	0.300	4,4	3"	12"
LV600P	0.27 Calibre	0.300	4,9	1-1/2"	17"



Magazine cartridges - Calibre 6.8/11 mm

Product Code	Cartridge Calibre	Colour	Power of Cartridge	Box Packing	Outer Packing
TCGM	6.8/11	Green	Weak	100	10000
TCYM	6.8/11	Yellow	Average	100	10000
TCRM	6.8/11	Red	Strong	100	10000
TCBM	6.8/11	Black	Very Strong	100	10000

Suitable for: LV350, DX5 and DX460

NEW





LV500M

Product Code	Cartridge Calibre	Head Diameter (")	Tool Weight (lbs)	Magazine Nail Length/ Single (")	Tool Length (")
LV500M	6.8/11 (Strip)	5/16"	7	5/8" - 2-7/8" / 5/8" - 2-3/8"	18"



0.300 TD Drive Pins 5/16" Plastic Washer

Product Code	Nail Diameter (")	Nail Length (")	Type of Substrate	Box Packing	Outer Packing
TD16K	0.145"	5/8"	Steel	100	2000
TD19K	0.145"	3/4"	Steel	100	2000
TD22K	0.145"	7/8"	Steel	100	2000
TD27	0.145"	1-1/8"	Steel/Concrete/Brick	100	2000
TD32	0.145"	1-1/4"	Steel/Concrete/Brick	100	2000
TD37	0.145"	1-3/8"	Steel/Concrete/Brick	100	2000
TD42	0.145"	1-3/4"	Steel/Concrete/Brick	100	2000
TD47	0.145"	2"	Steel/Concrete/Brick	100	2000
TD52	0.145"	2-1/8"	Steel/Concrete/Brick	100	1000
TD57	0.145"	2-1/4"	Steel/Concrete/Brick	100	1000
TD62	0.145"	2-1/2"	Steel/Concrete/Brick	100	1000
TD72	0.145"	3"	Steel/Concrete/Brick	100	1000
TD82	0.145"	3-1/4"	Steel/Concrete/Brick	100	1000
TD97	0.145"	3-3/4"	Steel/Concrete/Brick	100	1000



Suitable for: LV350, DX5 and DX460

0.300 TD Drive Pins 1" Metal Washer

Product Code	Nail Diameter (")	Nail Length (")	Type of Substrate	Washer Diameter (mm)	Box Packing	Outer Packing
TMWP27	0.145"	1"	Steel/Concrete	1"	100	1500
TMWP32	0.145"	1-1/4"	Steel/Concrete	1"	100	1500
TMWP47	0.145"	2"	Steel/Concrete	1"	100	1500



Suitable for: LV350, DX5 and DX460

0.300 Top Hat Nail

Product Code	Nail Diameter (mm)	Nail Length (mm)	Type of Substrate	Box Packing	Outer Packing
TH19	0.145"	3/4"	Steel	100	2000



Suitable for: LV350, DX5 and DX460

0.300 TXCC Ceiling Anchor

(Suspension Clip suitable for 5/16" Cartridge Tools)

Product Code	Shank Diameter (")	Nail Length (")	Box Packing	Outer Packing
TXCC32	0.145"	1-1/4"	100	2000



Suitable for: LV350, DX5 and DX460


TCC Conduit Clips

(Conduit Clip suitable for 5/16" Cartridge Tools or TGTC38 Gas tool)

Product Code	Pipe/Cable Diameter (")	Hole Size (")	Box Packing	Outer Packing
TCC16	5/8"	1/4"	50	1000
TCC20	3/4"	1/4"	50	1000



Suitable for: LV350, LV600, TGTC38



Product Code	Diameter (")	Drill Hole Diameter (")	Anchor Length (")	Minimum Embedment (")	Box Packing	Outer Packing
TT14134	1/4"	1/4"	1-3/4"	1-1/8"	100	600
TT14214	1/4"	1/4"	2-1/4"	1-1/8"	100	600
TT14314	1/4"	1/4"	3-1/4"	1-1/8"	100	600
TT38214	3/8"	3/8"	2-1/4"	1 5/8"	50	300
TT38234	3/8"	3/8"	2-3/4"	1-5/8"	50	300
TT38300	3/8"	3/8"	3"	1-5/8"	50	300
TT38312	3/8"	3/8"	3-1/2"	1-5/8"	50	300
TT38334	3/8"	3/8"	3-3/4"	1-5/8"	50	300
TT38500	3/8"	3/8"	5"	1-5/8"	50	300
TT38700	3/8"	3/8"	7"	1-5/8"	50	200
TT12234	1/2"	1/2"	2-3/4"	2-1/4"	50	200
TT12334	1/2"	1/2"	3-3/4"	2-1/4"	50	200
TT12412	1/2"	1/2"	4-1/2"	2-1/4"	50	200
TT12512	1/2"	1/2"	5-1/2"	2-1/4"	50	150
TT12700	1/2"	1/2"	7"	2-1/4"	25	100
TT12812	1/2"	1/2"	8-1/2"	2-1/4"	25	100
TT58312	5/8"	5/8"	3-1/2"	2-3/4"	25	100
TT58412	5/8"	5/8"	4-1/2"	2-3/4"	25	100
TT58500	5/8"	5/8"	5"	2-3/4"	25	100
TT58600	5/8"	5/8"	6"	2-3/4"	25	75
TT58700	5/8"	5/8"	7"	2-3/4"	25	75
TT58812	5/8"	5/8"	8-1/2"	2-3/4"	25	50
TT34414	3/4"	3/4"	4-1/4"	3-3/8"	20	60
TT34434	3/4"	3/4"	4-3/4"	3-3/8"	20	60
TT34512	3/4"	3/4"	5-1/2"	3-3/8"	20	60
TT34614	3/4"	3/4"	6-1/4"	3-3/8"	20	60
TT34700	3/4"	3/4"	7"	3-3/8"	20	60
TT34812	3/4"	3/4"	8-1/2"	3-3/8"	10	40
TT34100	3/4"	3/4"	10"	3-3/8"	10	40
TT16000	1"	1"	6"	4-1/2"	10	30
TT16900	1"	1"	9"	4-1/2"	10	20
TT11200	1"	1"	12"	4-1/2"	5	10



Wedge Anchor ICC Cat 1 – Crack Approved (Steel White Zinc Plated, St/St Clip)

Product Code	Diameter (")	Drill Hole Diameter (")	Anchor Length (")	Minimum Embedment (")	Box Packing	Outer Packing
*TX14134CC	1/4"	1/4"	1-3/4"	1-1/2"	100	800
*TX14214CC	1/4"	1/4"	2-1/4"	2"	100	800
*TX14314CC	1/4"	1/4"	3-1/4"	2-2"	100	800
*TX38214CC	3/8"	3/8"	2-1/4"	3-1/3"	50	400
*TX38234CC	3/8"	3/8"	2-3/4"	2-1/3"	50	400
TX38300CC	3/8"	3/8"	3"	2-1/3"	50	200
TX38312CC	3/8"	3/8"	3-1/2"	2-1/3"	50	200
TX38334CC	3/8"	3/8"	3-3/4"	2-1/3"	50	200
TX38500CC	3/8"	3/8"	5"	2-1/3"	50	200
TX38700CC	3/8"	3/8"	7"	2-1/3"	50	100
*TX12234CC	1/2"	1/2"	2-3/4"	2-1/3"	50	200
TX12334CC	1/2"	1/2"	3-3/4"	2-1/3"	50	200
TX12412CC	1/2"	1/2"	4-1/2"	2-1/3"	50	100
TX12512CC	1/2"	1/2"	5-1/2"	2-1/3"	25	100
TX12700CC	1/2"	1/2"	7"	2-1/3"	25	100
TX12100CC	1/2"	1/2"	6-10"	2-1/3"	25	50
*TX58312CC	5/8"	5/8"	3-1/2"	3-1/4"	20	80
TX58412CC	5/8"	5/8"	4-1/2"	3-1/4"	20	80
TX58500CC	5/8"	5/8"	5"	3-1/4"	20	80
TX58600CC	5/8"	5/8"	6"	3-1/4"	20	40
TX58700CC	5/8"	5/8"	7"	3-1/4"	20	40
TX58812CC	5/8"	5/8"	8-1/2"	3-1/4"	20	40
*TX34414CC	3/4"	3/4"	4-1/4"	3-3/4"	10	40
*TX34434CC	3/4"	3/4"	4-3/4"	3-3/4"	10	40
TX34512CC	3/4"	3/4"	5-1/2"	3-3/4"	10	40
TX34614CC	3/4"	3/4"	6-1/4"	3-3/4"	10	40
TX34700CC	3/4"	3/4"	7"	3-3/4"	10	40
TX34812CC	3/4"	3/4"	8-1/2"	3-3/4"	10	20
TX34100CC	3/4"	3/4"	10"	3-3/4"	10	20

*This size is less than the required minimum standard anchor length for strength design



Wedge Anchor ICC Cat 1 – Crack Approved (Steel White Zinc Plated, St/St Clip)

Product Code	Diameter (")	Drill Hole Diameter (")	Anchor Length (")	Minimum Embedment (")	Box Packing	Outer Packing
*TX14134CC	1/4"	1/4"	1-3/4"	1-1/2"	100	800
*TX14214CC	1/4"	1/4"	2-1/4"	2"	100	800
*TX14314CC	1/4"	1/4"	3-1/4"	2-2"	100	800
*TX38214CC	3/8"	3/8"	2-1/4"	3-1/3"	50	400
*TX38234CC	3/8"	3/8"	2-3/4"	2-1/3"	50	400
TX38300CC	3/8"	3/8"	3"	2-1/3"	50	200
TX38312CC	3/8"	3/8"	3-1/2"	2-1/3"	50	200
TX38334CC	3/8"	3/8"	3-3/4"	2-1/3"	50	200
TX38500CC	3/8"	3/8"	5"	2-1/3"	50	200
TX38700CC	3/8"	3/8"	7"	2-1/3"	50	100
*TX12234CC	1/2"	1/2"	2-3/4"	2-1/3"	50	200
TX12334CC	1/2"	1/2"	3-3/4"	2-1/3"	50	200
TX12412CC	1/2"	1/2"	4-1/2"	2-1/3"	50	100
TX12512CC	1/2"	1/2"	5-1/2"	2-1/3"	25	100
TX12700CC	1/2"	1/2"	7"	2-1/3"	25	100
TX12100CC	1/2"	1/2"	6-10"	2-1/3"	25	50
*TX58312CC	5/8"	5/8"	3-1/2"	3-1/4"	20	80
TX58412CC	5/8"	5/8"	4-1/2"	3-1/4"	20	80
TX58500CC	5/8"	5/8"	5"	3-1/4"	20	80
TX58600CC	5/8"	5/8"	6"	3-1/4"	20	40
TX58700CC	5/8"	5/8"	7"	3-1/4"	20	40
TX58812CC	5/8"	5/8"	8-1/2"	3-1/4"	20	40
*TX34414CC	3/4"	3/4"	4-1/4"	3-3/4"	10	40
*TX34434CC	3/4"	3/4"	4-3/4"	3-3/4"	10	40
TX34512CC	3/4"	3/4"	5-1/2"	3-3/4"	10	40
TX34614CC	3/4"	3/4"	6-1/4"	3-3/4"	10	40
TX34700CC	3/4"	3/4"	7"	3-3/4"	10	40
TX34812CC	3/4"	3/4"	8-1/2"	3-3/4"	10	20
TX34100CC	3/4"	3/4"	10"	3-3/4"	10	20

*This size is less than the required minimum standard anchor length for strength design





Stainless Steel 316 Steel Wedge Anchors (Stainless Steel 316, St/St Clip)

Product Code	Diameter (")	Drill Hole Diameter (")	Anchor Length (")	Minimum Embedment (")	Box Packing	Outer Packing
TXA6SS14134	1/4"	1/4"	1-3/4"	1-1/8"	100	600
TXA6SS14214	1/4"	1/4"	2-1/4"	1-1/8"	100	600
TXA6SS14314	1/4"	1/4"	3-1/4"	1-1/8"	100	600
TXA6SS38214	3/8"	3/8"	2-1/4"	1-3/8"	50	300
TXA6SS38234	3/8"	3/8"	2-3/4"	1-3/8"	50	300
TXA6SS38300	3/8"	3/8"	3"	1-3/8"	50	300
TXA6SS38312	3/8"	3/8"	3-1/2"	1-3/8"	50	300
TXA6SS38334	3/8"	3/8"	3-3/4"	1-3/8"	50	300
TXA6SS38500	3/8"	3/8"	5"	1-3/8"	50	300
TXA6SS12234	1/2"	1/2"	2-3/4"	1-7/8"	50	200
TXA6SS12334	1/2"	1/2"	3-3/4"	1-7/8"	50	200
TXA6SS12412	1/2"	1/2"	4-1/2"	1-7/8"	50	200
TXA6SS12512	1/2"	1/2"	5-1/2"	1-7/8"	50	150
TXA6SS12700	1/2"	1/2"	7"	1-7/8"	25	100
TXA6SS58312	5/8"	5/8"	3-1/2"	2-1/2"	25	100
TXA6SS58412	5/8"	5/8"	4-1/2"	2-1/2"	25	100
TXA6SS58500	5/8"	5/8"	5"	2-1/2"	25	100
TXA6SS58600	5/8"	5/8"	6"	2-1/2"	25	75
TXA6SS58700	5/8"	5/8"	7"	2-1/2"	25	75
TXA6SS58812	5/8"	5/8"	8-1/2"	2-1/2"	25	50
TXA6SS34414	3/4"	3/4"	4-1/4"	3-3/8"	20	60
TXA6SS34434	3/4"	3/4"	4-3/4"	3-3/8"	20	60
TXA6SS34512	3/4"	3/4"	5-1/2"	3-3/8"	20	60
TXA6SS34614	3/4"	3/4"	6-1/4"	3-3/8"	20	60
TXA6SS34700	3/4"	3/4"	7"	3-3/8"	20	60
TXA6SS34812	3/4"	3/4"	8-1/2"	3-3/8"	10	40



Wedge Anchor Stainless Steel 304
(Stainless Steel 304, S/S Clip)

Product Code	Diameter (")	Drill Hole Diameter (")	Anchor Length (")	Minimum Embedment (")	Box Packing	Outer Packing
TTA4SS14134	1/4"	1/4"	1-3/4"	1-1/8"	100	600
TTA4SS14214	1/4"	1/4"	2-1/4"	1-1/8"	100	600
TTA4SS14314	1/4"	1/4"	3-1/4"	1-1/8"	100	600
TTA4SS38214	3/8"	3/8"	2-1/4"	1-3/8"	50	300
TTA4SS38234	3/8"	3/8"	2-3/4"	1-3/8"	50	300
TTA4SS38300	3/8"	3/8"	3"	1-3/8"	50	300
TTA4SS38312	3/8"	3/8"	3-1/2"	1-3/8"	50	300
TTA4SS38334	3/8"	3/8"	3-3/4"	1-3/8"	50	300
TTA4SS38500	3/8"	3/8"	5"	1-3/8"	50	300
TTA4SS12234	1/2"	1/2"	2-3/4"	1-7/8"	50	200
TTA4SS12334	1/2"	1/2"	3-3/4"	1-7/8"	50	200
TTA4SS12412	1/2"	1/2"	4-1/2"	1-7/8"	50	200
TTA4SS12512	1/2"	1/2"	5-1/2"	1-7/8"	50	150
TTA4SS12700	1/2"	1/2"	7"	1-7/8"	25	100
TTA4SS58312	5/8"	5/8"	3-1/2"	2-1/2"	25	100
TTA4SS58412	5/8"	5/8"	4-1/2"	2-1/2"	25	100
TTA4SS58500	5/8"	5/8"	5"	2-1/2"	25	100
TTA4SS58600	5/8"	5/8"	6"	2-1/2"	25	75
TTA4SS58700	5/8"	5/8"	7"	2-1/2"	25	75
TTA4SS58812	5/8"	5/8"	8-1/2"	2-1/2"	25	50
TTA4SS34414	3/4"	3/4"	4-1/2"	3-3/8"	20	60
TTA4SS34434	3/4"	3/4"	4-3/4"	3-3/8"	20	60
TTA4SS34512	3/4"	3/4"	5-1/2"	3-3/8"	20	60
TTA4SS34614	3/4"	3/4"	6-1/4"	3-3/8"	20	60
TTA4SS34700	3/4"	3/4"	7"	3-3/8"	20	60
TTA4SS34812	3/4"	3/4"	8-1/2"	3-3/8"	10	40
TTA4SS34100	3/4"	3/4"	10"	3-3/8"	10	40
TTA4SS16000	1"	1"	6"	4-1/2"	10	30
TTA4SS19000	1"	1"	9"	4-1/2"	10	20
TTA4SS11200	1"	1"	12"	4-1/2"	5	10



Sure Bolt - Cracked Concrete Approved (Steel White Zinc Plated)



Product Code	Drill Hole Diameter (")	Anchor Length (")	Min. Embed. Depth (")	Box Packing	Outer Packing
*CB14114CC	1/4"	1-1/4"	1"	100	800
*CB14134CC	1/4"	1-3/4"	1-1/2"	100	800
*CB14214CC	1/4"	2-1/4"	1-5/8"	100	400
*CB14300CC	1/4"	3"	1-5/8"	50	400
*CB38134CC	3/8"	1-3/4"	1-1/2"	50	200
CB38212CC	3/8"	2-1/2"	2-1/4"	50	200
CB38300CC	3/8"	3"	2-1/2"	50	200
CB38400CC	3/8"	4"	2-1/2"	50	200
CB38500CC	3/8"	5"	2-1/2"	50	200
CB38600CC	3/8"	6"	2-1/2"	50	200
*CB12200CC	1/2"	2"	1-3/4"	50	100
*CB12212CC	1/2"	2-1/2"	2-1/4"	50	100
CB12300CC	1/2"	3"	2-3/4"	50	100
CB12400CC	1/2"	4"	3"	50	100
CB12500CC	1/2"	5"	3"	25	50
CB12600CC	1/2"	6"	3"	25	50
CB12800CC	1/2"	8"	3"	20	80
*CB58300CC	5/8"	3"	2-3/4"	25	50
CB58400CC	5/8"	4"	3-1/4"	25	50
CB58500CC	5/8"	5"	3-1/4"	25	50
CB58600CC	5/8"	6"	3-1/4"	20	40
CB58800CC	5/8"	8"	3-1/4"	20	40
CB34400CC	3/4"	4"	3-3/4"	20	40
CB34500CC	3/4"	5"	4"	20	40
CB34600CC	3/4"	6"	4"	10	20
CB34800CC	3/4"	8"	4"	10	20
CB34100CC	3/4"	10"	4"	10	20

Concrete Bolt (Steel White Zinc Plated)


 LABORATORY
TESTED

Product Code	Drill Hole Diameter (")	Anchor Length (")	Min. Embed. Depth (")	Box Packing	Outer Packing
CB14114	1/4"	1-1/4"	1"	100	800
CB14134	1/4"	1-3/4"	1-1/2"	100	800
CB14214	1/4"	2-1/4"	1-5/8"	100	400
CB14300	1/4"	3"	1-5/8"	50	400
CB38134	3/8"	1-3/4"	1-1/2"	50	200
CB38212	3/8"	2-1/2"	2-1/4"	50	200
CB38300	3/8"	3"	2-1/2"	50	200
CB38400	3/8"	4"	2-1/2"	50	200
CB38500	3/8"	5"	2-1/2"	50	200
CB38600	3/8"	6"	2-1/2"	50	200
CB12200	1/2"	2"	1-3/4"	50	100
CB12212	1/2"	2-1/2"	2-1/4"	50	100
CB12300	1/2"	3"	2-3/4"	50	100
CB12400	1/2"	4"	3"	50	100
CB12500	1/2"	5"	3"	25	50
CB12600	1/2"	6"	3"	25	50
CB12800	1/2"	8"	3"	20	80

Anchor Bolt for Concrete - Rod Hanger

(steel white zinc plated)



Product Code	Description	Anchor Length (")	Inner Thread Diameter (")	Box Packing	Outer Packing
VHC1411414	Concrete Hanger 1/4" x 1-1/4" with 1/4" Coupler	1-1/4"	Insert 1/4" Rod	25	250
VHC1411238	Concrete Hanger 1/4" x 1-1/2" with 3/8" Coupler	1-1/2"	Insert 3/8" Rod	25	250
VHC3823412	Concrete Hanger 3/8" x 2-3/4" with 1/2" Coupler	2-3/4"	Insert 1/2" Rod	25	200



Sleeve Anchor - Hex Bolt (Steel White Zinc Plated)

Product Code	Drill Hole Diameter (")	Anchor Length (")	Max. Fixture Thickness (")	Box Packing	Outer Packing
TSAH516112	5/16"	1-1/2"	1"	100	600
TSAH516212	5/16"	2-1/2"	1"	100	500
TSAH381780	3/8"	1-7/8"	1-1/4"	50	400
TSAH383000	3/8"	3"	1-1/4"	50	250
TSAH384000	3/8"	4"	1-1/4"	50	250
TSAH122120	1/2"	2-1/2"	1-1/2"	25	150
TSAH582140	5/8"	2-1/4"	2"	25	125
TSAH123000	1/2"	3"	1-1/2"	25	150
TSAH126000	1/2"	6"	1-1/2"	10	50
TSAH583000	5/8"	3"	2"	25	125
TSAH584140	5/8"	4-1/4"	2"	10	80
TSAH585340	5/8"	5-3/4"	2"	10	50
TSAH342140	3/4"	2-1/2"	2-1/4"	10	80
TSAH344140	3/4"	4-1/4"	2-1/4"	10	40
TSAH346140	3/4"	6-1/4"	2-1/4"	10	30
TSAH348140	3/4"	8-1/4"	2-1/4"	5	20



Sleeve Anchor - Countersunk (Steel White Zinc Plated)

Product Code	Drill Hole Diameter (")	Anchor Length (")	Max. Fixture Thickness (")	Box Packing	Outer Packing
TSAA145800	1/4"	5/8"	1/2"	100	1000
TSAA141380	1/4"	1-3/8"	1/2"	100	800
TSAA142140	1/4"	2-1/4"	1/2"	100	600
TSAC382340	3/8"	2-3/4"	1-1/4"	50	300
TSAC384000	3/8"	4"	1-1/4"	50	250
TSAC385000	3/8"	5"	1-1/4"	50	250
TSAC386000	3/8"	6"	1-1/4"	50	250



Sleeve Anchor - Hex Nut (Steel White Zinc Plated)

Product Code	Drill Hole Diameter (")	Anchor Length (")	Max. Fixture Thickness (")	Box Packing	Outer Packing
TSA516112	5/16"	1-1/2"	1"	100	600
TSA516212	5/16"	2-1/2"	1"	100	500
TSA381780	3/8"	1-7/8"	1-1/4"	50	400
TSA383000	3/8"	3"	1-1/4"	50	250
TSA384000	3/8"	4"	1-1/4"	50	250
TSA122120	1/2"	2-1/2"	1-1/2"	25	150
TSA582140	5/8"	2-1/4"	2"	25	125
TSA123000	1/2"	3"	1-1/2"	25	150
TSA126000	1/2"	6"	1-1/2"	10	50
TSA583000	5/8"	3"	2"	25	125
TSA584140	5/8"	4-1/4"	2"	10	80
TSA585340	5/8"	5-3/4"	2"	10	50
TSA342140	3/4"	2-1/2"	2-1/4"	10	80
TSA344140	3/4"	4-1/4"	2-1/4"	10	40
TSA346140	3/4"	6-1/4"	2-1/4"	10	30
TSA348140	3/4"	8-1/4"	2-1/4"	5	20



Double Expansion Anchors



Product Code	Diameter (")	Drill Hole Diameter (")	Anchor Length (")	Minimum Embedment (")	Box Packing	Outer Packing
DB14	1/4"	1/2"	1-3/8"	1-1/4"	50	500
DB516	5/16"	5/8"	1-5/8"	1-1/2"	50	500
DB38	3/8"	3/4"	2"	1-3/4"	50	250
DB12	1/2"	7/8"	2-1/2"	2-1/4"	25	250
DB58	5/8"	1"	2-3/4"	2-1/2"	25	125
DB34	3/4"	1-1/4"	3-15/16"	3-1/2"	10	50

Zamac Sheild Anchor



Product Code	Diameter (")	Drill Hole Diameter (")	Anchor Length (")	Box Packing	Outer Packing
ZS316	3/16"	3/8"	1-5/8"	50	500
ZS14	1/4"	1/2"	1-3/4"	50	500
ZS516	5/16"	5/8"	2"	50	250
ZS38	3/8"	5/8"	2"	25	250
ZS12	1/2"	7/8"	3-1/4"	25	250
ZS58	5/8"	1"	4"	10	100

Single Expansion Anchors



Product Code	Diameter (")	Drill Hole Diameter (")	Anchor Length (")	Minimum Embedment (")	Box Packing	Outer Packing
SNG14	1/4"	1/2"	1-5/16"	1-3/8"	50	250
SNG516	5/16"	5/8"	1-1/2"	1-5/8"	50	250
SNG38	3/8"	5/8"	1-1/2"	1-5/8"	50	250
SNG12	1/2"	7/8"	2-1/16"	2-1/4"	25	125
SNG58	5/8"	1"	2-5/8"	2-3/4"	25	125

Lag Shields



Product Code	Diameter (")	Drill Hole Diameter (")	Minimum Embedment (")	Box Packing	Outer Packing
LS14S	1/4" Short	1/2"	1"	50	500
LS14L	1/4" Long	1/2"	1-1/2"	50	500
LS516S	5/16" Short	1/2"	1-1/4"	50	500
LS516L	5/16" Long	1/2"	1-3/4"	50	500
LS38S	3/8" Short	5/8"	1-3/4"	50	500
LS38L	3/8" Long	5/8"	2-1/2"	50	250
LS12S	1/2" Short	3/4"	2" 3"	50	500
LS12L	1/2" Long	3/4"	2"	50	200
LS58S	5/8" Short	7/8"		25	125

Calk-In Anchors



Product Code	Diameter (")	Drill Hole Diameter (")	Tool Code	Minimum Embedment (")	Box Packing	Outer Packing
TCI1024	3/8"	3/8"	CIT10	5/8"	100	1000
TCI1420	1/2"	1/2"	CIT14	7/8"	100	600
TCI51618	5/8"	5/8"	CIT516	1"	50	300
TCI3816	3/4"	3/4"	CIT38	1-1/4"	50	300
TCI1213	7/8"	7/8"	CIT12	1-1/2"	50	250

Calk-In Anchor Setting Tool



Product Code	For use with	Box Packing	Outer Packing
CIT10	TCI1024	100	1000
CIT14	TCI1420	100	600
CIT516	TCI51618	50	300
CIT38	TCI3816	50	300
CIT12	TCI1213	50	250



Drop In Anchors UL listed



Drop-in Anchors - Carbon Steel

Product Code	Type	Thread Diameter (")	Drill Hole Diameter (")	Anchor Length (")	Minimum Embedment (")	Box Packing	Outer Packing
DI14	Carbon Steel Drop In	1/4"	3/8"	1"	1"	100	1000
DI38	Carbon Steel Drop In	3/8"	1/2"	1-9/16"	1-9/16"	50	500
DI12	Carbon Steel Drop In	1/2"	5/8"	2"	2"	50	300
DI58	Carbon Steel Drop In	5/8"	7/8"	2-1/2"	2-1/2"	25	125
DI34	Carbon Steel Drop In	3/4"	1"	3-3/16"	3-3/16"	10	50
DIC12	Coil Thread Drop in	1/2"	5/8"	2"	2"	50	300
DIC34	Coil Thread Drop in	3/4"	1"	3-3/16"	3-3/16"	10	90



MECHANICAL ANCHORS

Drop-in Anchors - Stainless Steel

Product Code	Type	Thread Diameter (")	Drill Hole Diameter (")	Anchor Length (")	Minimum Embedment (")	Box Packing	Outer Packing
DI4SS14	Stainless Steel Drop In	1/4"	3/8"	1"	1"	100	1000
DI4SS38	Stainless Steel Drop In	3/8"	1/2"	1-9/16"	1-9/16"	50	500
DI4SS12	Stainless Steel Drop In	1/2"	5/8"	2"	2"	50	300
DI6SS14	Stainless Steel Drop In	1/4"	3/8"	1"	1"	100	1000
DI6SS38	Stainless Steel Drop In	3/8"	1/2"	1-9/16"	1-9/16"	50	500
DI6SS12	Stainless Steel Drop In	1/2"	5/8"	2"	2"	50	300



Drop-in Anchors - Shallow Embedment

Product Code	Type	Thread Diameter (")	Drill Hole Diameter (")	Anchor Length (")	Minimum Embedment (")	Box Packing	Outer Packing
DIL14	Carbon Steel S/E Drop In	1/4"	3/8"	5/8"	5/8"	100	1000
DIL38	Carbon Steel S/E Drop In	3/8"	1/2"	3/4"	3/4"	100	1000
DIL12	Carbon Steel S/E Drop In	1/2"	5/8"	1"	1"	25	300



Drop-in Anchors Knurled - Carbon Steel

Product Code	Type	Thread Diameter (")	Drill Hole Diameter (")	Anchor Length (")	Minimum Embedment (")	Box Packing	Outer Packing
DI14K	Carbon Steel Drop In	1/4"	3/8"	1"	1"	100	1000
DI38K	Carbon Steel Drop In	3/8"	1/2"	1-9/16"	1-9/16"	50	500
DI12K	Carbon Steel Drop In	1/2"	5/8"	2"	2"	50	300
DI58K	Carbon Steel Drop In	5/8"	7/8"	2-1/2"	2-1/2"	25	125
DI34K	Carbon Steel Drop In	3/4"	1"	3-3/16"	3-3/16"	10	50
DIC12K	Coil Thread Drop in	1/2"	5/8"	2"	2"	50	300
DIC34K	Coil Thread Drop in	3/4"	1"	3-3/16"	3-3/16"	10	90



Drop-In Anchor Setting Tool (Steel White Zinc Plated)

Product Code	For use with	Box Packing	Outer Packing
DST14	1/4"	1	250
DST38	3/8"	1	100
DST12	1/2"	1	100
DST58	5/8"	1	50
DST34	3/4"	1	25
DSTM14	1/4"	1	50
DSTM38	3/8"	1	50
DSTM12	1/2"	1	50





PURE EPOXY
STYRENE FREE 1:1

Pure Epoxy - 1:1

- Suitable for high loads featuring large diameters and deep embedment.
- Longer working times make it suitable for large holes, and high temperatures.
- No shrinkage, good for large diameter fixings.
- Use in wet or flooded environments and fixing holes, or underwater.
- High durability, resistance to chemicals.
- Used for diamond drilled holes.
- Solvent free resin.
- Fixings in concrete, wood, or other high strength materials.



Product Code	Recommended Type of Substrate	Capacity (oz)	Box Packaging	For Use with:
TCM22PE	Concrete, Stone	22 oz	10	TCM22MTP



HEAVY LOADS



PURE EPOXY
ECO 10:1

TCM 10 PE - PURE EPOXY

- Suitable for high loads within standard annulus and embedments.
- Fast working times for early loading in time sensitive applications.
- No styrene allows for use indoors and in enclosed spaces.
- Use in wet or damp environments and fixing holes.
- Good durability formulation, resistance to chemicals.
- Used for studs and relatively small diameter rebar.
- 10:1 resin available in a variety of cartridge types.
- Fixings in concrete, wood, or other high strength materials.



Product Code	Recommended Type of Substrate	Capacity (oz)	Box Packaging	For Use with:
TCM10 PE	Concrete, Stone	10 oz	12	TCM10MTP



MEDIUM TO HEAVY LOADS



ACRYLIC
ECO 10:1

TCMEA10 - ACRYLIC

- Suitable for medium loads for non-critical applications.
- Fast working times for early loading in time sensitive applications.
- No styrene allows for use indoors and in enclosed spaces.
- Use in damp & wet environments and fixing holes.
- Extremely versatile in masonry, hollow, aerated concrete.
- Available with colour change technology (Blue to Grey gel indicator)



Product Code	Recommended Type of Substrate	Capacity (oz)	Box Packaging	For Use with:
TCMEA10	Concrete, Stone	10 oz	12	TCM10MTP





Internally threaded sleeve

(Steel)

Product Code	Thread Diameter (")	Outer Diameter of Sleeve (")	Drill Hole Diameter (")	Sleeve Length (")	Box Packing	Outer Packing
TIS06	1/4"	5/16"	3/8"	2"	100	1000
TIS08	5/16"	1/2"	1/2"	2"	50	500
TIS10	3/8"	9/16"	5/8"	3"	50	250
TIS12	1/2"	5/8"	3/4"	3"	25	25

Product Code	For use with Cartridge capacity (oz)	Box Packing	Outer Packing
TCM22MTP	22 oz	1	5
TCM10MTP	10 oz	1	12

Debris Blow Out Pump

Product Code	Description	Box Packing
TBP01	Pump for hole cleaning	1

Hole Cleaning Brushes

Product Code	For use with Drill Hole Diameter (")	Working length of Brush (")	Overall Length (")	Description
TCB13	5/16" - 1/2"	3"	12"	Steel Brush
TCB18	9/16" - 3/4"	3"	12"	Steel Brush
TCB28	7/8" - 1-1/4"	3"	12"	Steel Brush

Cartridge Nozzle

Product Code	Mixer Length (")	Description
TCN01	10"	For use with 10, 13, 14 oz
TCN02	10"	For use with 20 oz
TEN01	10"	Mixer Extension

Perforated Sleeve (Nylon)

Product Code	Drill Hole Diameter (")	Hole Depth (")	Diameter/Length of Tube (")	For use with Threaded Rods	Box Packing	Outer Packing
TPS01	1/2"	2-1/4"	1/2" / 2"	M6-M8	50	2300
TPS02	5/8"	3-1/2"	5/8" / 3-1/2"	M10-M12	20	1000
TPS03	5/8"	5-1/2"	5/8" / 5-1/2"	M10-M12	20	1000
TPS04	7/8"	3-1/2"	3/4" / 3-1/2"	M16	20	1000

Wire Mesh sleeve

(Steel)

Product Code	Drill Hole Diameter (")	Outer Diameter of Sleeve (")	For use with Threaded Rods	Sleeve Length (")	Box Packing
TMS12	1/2"	1/2"	M6-M8	40"	1
TMS16	5/8"	5/8"	M10-M12	40"	1
TMS22	7/8"	3/4"	M12-M16	40"	1
TMS26	1-1/8"	1"	M20	40"	1





Chemical Stud Anchor with hexagon socket

(Steel White Zinc Plated)

Product Code	Drill Hole Diameter (mm)	Thread Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TCS38	1/2"	3/8"	5-1/8"	3/4"	3-1/2"	10	200
TCS12	5/8"	1/2"	6-1/2"	1"	4"	10	200
TCS58	3/4"	5/8"	7-5/8"	1-1/2"	4-1/2"	10	80
TCS34	7/8"	3/4"	9-5/8"	2"	5"	10	80
TCS78	1"	7/8"	10"	2-1/2"	7"	10	30
TCS1	1-3/16"	1"	12"	3"	8-1/2"	5	30



Chemical Stud Anchor with hexagon socket

(Hot Dipped Galvanised)

Product Code	Drill Hole Diameter (mm)	Thread Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TCS38G	1/2"	3/8"	5-1/8"	3/4"	3-1/2"	10	200
TCS12G	5/8"	1/2"	6-1/2"	1"	4"	10	200
TCS58G	3/4"	5/8"	7-5/8"	1-1/2"	4-1/2"	10	80
TCS34G	7/8"	3/4"	9-5/8"	2"	5"	10	80
TCS78G	1"	7/8"	10"	2-1/2"	7"	10	30
TCS1G	1-3/16"	1"	12"	3"	8-1/2"	5	30



Chemical Stud Anchor with hexagon socket



(Stainless Steel A4-316)

Product Code	Drill Hole Diameter (mm)	Thread Diameter (mm)	Anchor Length (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
TCS38SS	1/2"	3/8"	5-1/8"	3/4"	3-1/2"	10	200
TCS12SS	5/8"	1/2"	6-1/2"	1"	4"	10	200
TCS58SS	3/4"	5/8"	7-5/8"	1-1/2"	4-1/2"	10	80
TCS34SS	7/8"	3/4"	9-5/8"	2"	5"	10	80
TCS78SS	1"	7/8"	10"	2-1/2"	7"	10	30
TCS1SS	1-3/16"	1"	12"	3"	8-1/2"	5	30

DesignFix®

THE BENCHMARK FOR ANCHOR DESIGN BECOME A REAL ANCHOR PROFESSIONAL

DesignFix is an all-purpose anchor design program for manufacturers of fasteners for free distribution to their clients such as engineers, planners or craftsmen. By using the software, the clients can design mechanical and chemical heavy duty anchors under static loads and under the influence of earthquake.

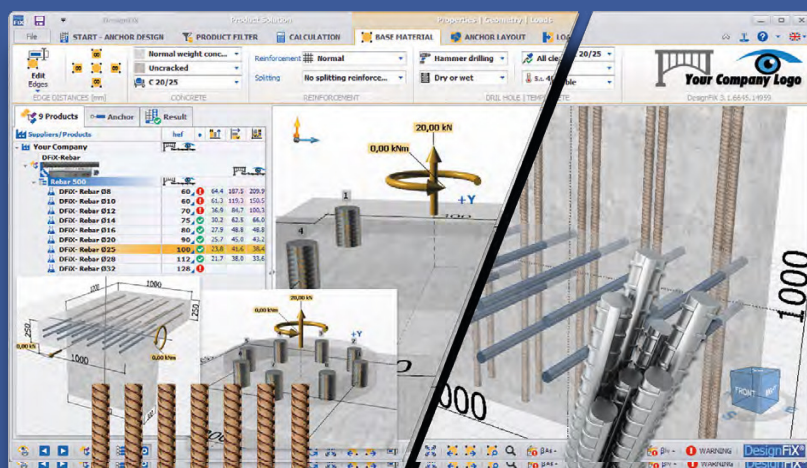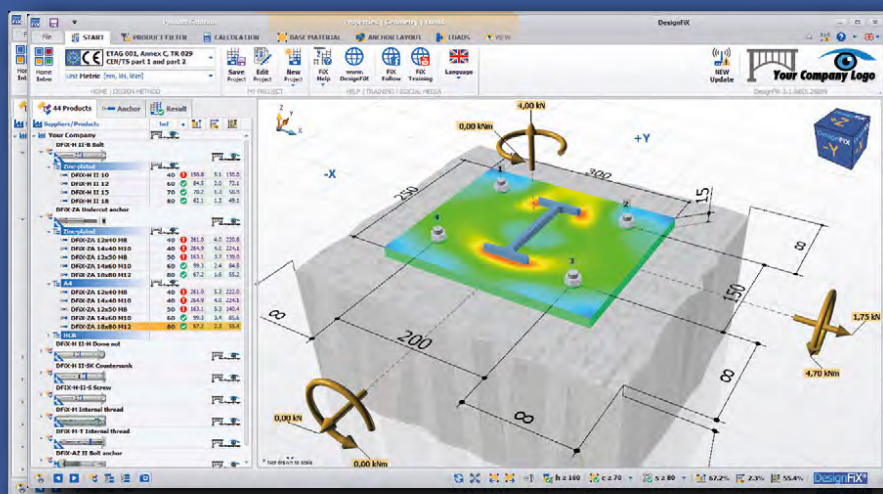

FOR MORE DETAILS PLEASE VISIT
WWW.TRUTEK.COM.PL



Strike Anchors

Product Code	Description	Drill Hole Diameter (")	Anchor Length (")	Min. Embed. Depth (")	Box Packing	Outer Packing
SPM316100	Zinc Strike	3/16"	1"	7/8"	100	1200
SPM316114	Zinc Strike	3/16"	1-1/4"	7/8"	100	1200
SPM316112	Zinc Strike	3/16"	1-1/2"	1-1/4"	100	1200
SPM316200	Zinc Strike	3/16"	2"	1-1/4"	100	1200
SPM316212	Zinc Strike	3/16"	2-1/2"	1-1/4"	100	1200
SPM316300	Zinc Strike	3/16"	3"	1-1/4"	100	800
SPM316400	Zinc Strike	3/16"	4"	1-1/4"	100	800
SPM141000	Zinc Strike	1/4"	1"	7/8"	100	1200
SPM141140	Zinc Strike	1/4"	1-1/4"	1"	100	1200
SPM141120	Zinc Strike	1/4"	1-1/2"	1-1/4"	100	1200
SPM142000	Zinc Strike	1/4"	2"	1-1/4"	100	800
SPM142120	Zinc Strike	1/4"	2-1/2"	1-1/4"	100	800
SPM143000	Zinc Strike	1/4"	3"	1-1/4"	100	800
SPM143120	Zinc Strike	1/4"	3-1/2"	1-1/4"	100	800
SPM144000	Zinc Strike	1/4"	4"	1-1/4"	100	800
SPM382000	Zinc Strike	3/8"	2"	1-3/4"	25	300
SPM382120	Zinc Strike	3/8"	2-1/2"	1-3/4"	25	300
SPM383000	Zinc Strike	3/8"	3"	1-3/4"	25	300
SPM384000	Zinc Strike	3/8"	4"	1-3/4"	25	200
SPM385000	Zinc Strike	3/8"	5"	1-3/4"	25	150
STW316	Strike	3/16"	1-1/8"	1-1/4"	100	800
STW140	Strike	1/4"	1-1/8"	1-1/4"	100	800
SPF316112	Double Head Strike	3/16"	1-1/2"	1-1/4"	100	1200
SPF316200	Double Head Strike	3/16"	2"	1-1/4"	100	800
SPF316234	Double Head Strike	3/16"	2-3/4"	1-1/4"	100	600
SPF142340	Double Head Strike	1/4"	2-3/4"	1-1/4"	100	600
SPP14	Strike Internally Threaded	1/4"	1-1/4"	1-1/4"	100	1200
SPP38	Strike Internally Threaded	1/4"	1-3/4"	1-3/4"	50	400



Metal Hammer-in Anchor

(ZnAl)

Product Code	Hole Diameter (")	Anchor Length (")	Min. Hole Depth (")	Box Packing	Outer Packing
ZNMH31678	3/16"	7/8"	3/4"	100	500
ZNMH1434	1/4"	3/4"	5/8"	100	500
ZNMH141	1/4"	1"	7/8"	100	500
ZNMH14114	1/4"	1-1/4"	1"	100	500
ZNMH14112	1/4"	1-1/2"	1-1/4"	100	500
ZNMH142	1/4"	2"	1-1/2"	100	500
ZNMH143	1/4"	3"	2-1/2"	100	500



Metal Hammer-in Anchor

(Stainless Steel)

Product Code	Hole Diameter (mm)	Anchor Length (mm)	Min. Hole Depth (mm)	Box Packing	Outer Packing
ZNMHSS141	1/4"	1"	7/8"	100	500
ZNMHSS14114	1/4"	1-1/4"	1"	100	500
ZNMHSS14112	1/4"	1-1/2"	1-1/4"	100	500
ZNMHSS142	1/4"	2"	1-1/2"	100	500



Tapscrew Blue Countersunk Hd

Product Code	Drill Hole Dia (")	Screw Dia (")	Screw Length (")	Min Embed. Depth (")	Drive	Box Packing	Outer Packing
*TCP316114	5/32"	3/16"	1-1/4"	1-1/4"	PH2	100	500
*TCP316134	5/32"	3/16"	1-3/4"	1-1/4"	PH2	100	500
TCP316214	5/32"	3/16"	2-1/4"	1-1/4"	PH2	100	500
TCP316234	5/32"	3/16"	2-3/4"	1-1/4"	PH2	100	500
TCP316314	5/32"	3/16"	3-1/4"	1-1/4"	PH2	100	500
TCP316334	5/32"	3/16"	3-3/4"	1-1/4"	PH2	100	500
TCP316400	5/32"	3/16"	4"	1-1/4"	PH2	100	500
*TCP141140	3/16"	1/4"	1-1/4"	1-1/4"	PH3	100	500
*TCP141340	3/16"	1/4"	1-3/4"	1-1/4"	PH3	100	500
TCP142140	3/16"	1/4"	2-1/4"	1-1/4"	PH3	100	500
TCP142340	3/16"	1/4"	2-3/4"	1-1/4"	PH3	100	500
TCP143140	3/16"	1/4"	3-1/4"	1-1/4"	PH3	100	500
TCP143340	3/16"	1/4"	3-3/4"	1-1/4"	PH3	100	500
TCP144000	3/16"	1/4"	4"	1-1/4"	PH3	100	500
TCP145000	3/16"	1/4"	5"	1-1/4"	PH3	100	500
TCP146000		1/4"	6"	1-1/4"	PH3	100	500



Tapscrew Blue Hex Hd

Product Code	Drill Hole Dia (")	Screw Dia (")	Screw Length (")	Min Embed. Depth (")	Drive	Box Packing	Outer Packing
*TCH316114	5/32"	3/16"	1-1/4"	1-1/4"		100	500
*TCH316134	5/32"	3/16"	1-3/4"	1-1/4"		100	500
TCH316214	5/32"	3/16"	2-1/4"	1-1/4"		100	500
TCH316234	5/32"	3/16"	2-3/4"	1-1/4"		100	500
TCH316314	5/32"	3/16"	3-1/4"	1-1/4"		100	500
TCH316334	5/32"	3/16"	3-3/4"	1-1/4"		100	500
TCH316400	5/32"	3/16"	4"	1-1/4"		100	500
*TCH141140	3/16"	1/4"	1-1/4"	1-1/4"		100	500
TCH141340	3/16"	1/4"	1-3/4"	1-1/4"		100	500
TCH142140	3/16"	1/4"	2-1/4"	1-1/4"		100	500
TCH142340	3/16"	1/4"	2-3/4"	1-1/4"		100	500
TCH143140	3/16"	1/4"	3-1/4"	1-1/4"		100	500
TCH143340	3/16"	1/4"	3-3/4"	1-1/4"		100	500
TCH144000	3/16"	1/4"	4"	1-1/4"		100	500



Tapscrew Blue Hex Hd SS410

Product Code	Drill Hole Dia (")	Screw Dia (")	Screw Length (")	Min Embed. Depth (")	Drive	Box Packing	Outer Packing
*TCH316114SS	5/32"	3/16"	1-1/4"	1-1/4"		100	500
*TCH316134SS	5/32"	3/16"	1-3/4"	1-1/4"		100	500
TCH316214SS	5/32"	3/16"	2-1/4"	1-1/4"		100	500
TCH316234SS	5/32"	3/16"	2-3/4"	1-1/4"		100	500
TCH316314SS	5/32"	3/16"	3-1/4"	1-1/4"		100	500
TCH316334SS	5/32"	3/16"	3-3/4"	1-1/4"		100	500
TCH316400SS	5/32"	3/16"	4"	1-1/4"		100	500
*TCH141140SS	3/16"	1/4"	1-1/4"	1-1/4"		100	500
TCH141340SS	3/16"	1/4"	1-3/4"	1-1/4"		100	500
TCH142140SS	3/16"	1/4"	2-1/4"	1-1/4"		100	500
TCH142340SS	3/16"	1/4"	2-3/4"	1-1/4"		100	500
TCH143140SS	3/16"	1/4"	3-1/4"	1-1/4"		100	500
TCH143340SS	3/16"	1/4"	3-3/4"	1-1/4"		100	500
TCH144000SS	3/16"	1/4"	4"	1-1/4"		100	500





Blue Banger Hanger - Steel Deck Inserts

Product Code	Size	Box Packing
HEA-SDI143812	1/4", 3/8", 1/2"	100
HEA-SD1381258	3/8", 1/2", 5/8"	100
HEA-SDI5834	5/8", 3/4"	50
CEABBDP1 Install Tool	1/4" - 3/8"	1
CEABBDP2 Install Tool	3/8" - 5/8"	1
HEA-RDI-143812	Roof Deck Insert	1
HEA-FSBX	New Universal FSB Bracket	1
RDI-2	Roof Deck Insert 2	1
POLMKEY36 3 ft.-6ft.	Tele. Keyless Chuck Poll	1
CEA-SB4	Step Bit For SDI 3/16" - 7/8"	1

Blue Banger Hanger - Pour in Place

Product Code	Size	Box Packing
HEA-PIP143812	1/4", 3/8", 1/2"	100
HEA-PIP381258	3/8", 1/2", 5/8"	100
HEA-PIP5834	5/8" - 3/4"	100
CEA-PIPInstallWide Tool	Pour-in-Place Tool wide	1



Drywall Anchors

Zinc

Product Code	Description	Wall Thickness (")	Screw Size (")	Box Packing	Outer Packing
ZPZ381	Zinc Drywall Anchor 3/8" to 1" w/Screw	3/8" - 1"	#8x1"	100	1000
ZPZ381NS	Zinc Drywall Anchor 3/8" to 1" w/o Screw	3/8" - 1"	#8x1"	100	1000
ZPZ381NSB	Zinc Drywall Anchor 3/8" to 1" w/o Screw	3/8" - 1"	#8x1"	1000	1000
ZPZ381K	Zinc Drywall Anchor 3/8" to 1" Kit	3/8" - 1"	#8x1"	1	10



Drywall Anchors

Nylon

Product Code	Description	Wall Thickness (")	Screw Size (")	Box Packing	Outer Packing
ZPN381	Nylon Drywall Anchor 3/8" to 1" w/Screw	3/8" - 1"	#8x1"	100	1000
ZPN381NS	Nylon Drywall Anchor 3/8" to 1" w/o Screw	3/8" - 1"	#8x1"	100	1000
ZPN381B	Nylon Drywall Anchor 3/8" to 1" Bulk	3/8" - 1"	#8x1"	1000	1000
ZPN381K	Nylon Drywall Anchor 3/8" to 1" Kit	3/8" - 1"	#8x1"	1	10



Nylon Drywall Toggle

Product Code	Description	Drill Diameter (")	Box Packing	Outer Packing
STG316	3/16" x 4"	1/2"	50	300
STG14	1/4" x 4"	1/2"	50	300
STG38	3/8" x 4"	3/4"	25	150
STG12	1/2" x 4"	3/4"	25	150



Drywall Zip Toggle

(supplied with a screw)

Product Code	Screw Diameter (")	Screw Length (")	Max. Fixture Thickness (")	Anchor	Box Packing	Outer Packing
TZT80	5/32"	3-1/4"	9/16"	1-1/4"	100	1000



Super MAX anchor

(supplied with a bolt)

Product Code	Screw Diameter (")	Screw Length (")	Max. Fixture Thickness (")	Anchor	Box Packing	Outer Packing
TSM10	1/2" x 4"	2-1/2"	1"	1-1/4"	100	1000



LIGHTWEIGHT ANCHORS



SDS Plus XTC 4 Cutter Drill Bits

Product Code	Drill Diameter (")	Working Length (")	Overall Length (mm)
TXTC05110	3/16"	2"	4-1/2"
TXTC06110	1/4"	2"	4-1/2"
TXTC07110	9/32"	2"	4-1/2"
TXTC08110	5/16"	2"	4-1/2"
TXTC05160	3/16"	4"	6-1/4"
TXTC06160	1/4"	4"	6-1/4"
TXTC08160	5/16"	4"	6-1/4"
TXTC10160	3/8"	4"	6-1/4"
TXTC12160	1/2"	4"	6-1/4"
TXTC16160	5/8"	4"	6-1/4"

Product Code	Drill Diameter (")	Working Length (")	Overall Length (")
TXTC06210	1/4"	6"	8-1/2"
TXTC08210	5/16"	6"	8-1/2"
TXTC10210	3/8"	6"	8-1/2"
TXTC12210	1/2"	6"	8-1/2"
TXTC16210	5/8"	6"	8-1/2"
TXTC06260	1/4"	8"	9-1/2"
TXTC65260	21/32"	8"	9-1/2"
TXTC08260	5/16"	8"	9-1/2"
TXTC10260	3/8"	8"	9-1/2"
TXTC12310	1/2"	10"	10-1/2"
TXTC16310	5/8"	10"	10-1/2"



Kit of SDS Plus XTC 4 Cutter Drill Bits

Product Code	Drill Diameter (")	Working Length (")	Overall Length (")
P10TXTC05110	3/16"	2"	4-1/2"
P10TXTC06110	1/4"	2"	4-1/2"
P10TXTC07110	9/32"	2"	4-1/2"
P10TXTC08110	5/16"	2"	4-1/2"
P10TXTC05160	3/16"	4"	6-1/4"
P10TXTC06160	1/4"	4"	6-1/4"
P10TXTC08160	5/16"	4"	6-1/4"

Product Code	Drill Diameter (")	Working Length (")	Overall Length (")
P10TXTC10160	3/8"	4"	6-1/4"
P10TXTC12160	1/2"	4"	6-1/4"
P10TXTC06210	1/4"	6"	8-1/2"
P10TXTC08210	5/16"	6"	8-1/2"
P10TXTC10210	3/8"	6"	8-1/2"
P10TXTC12210	1/2"	6"	8-1/2"

*The kit includes 10 drill bits.

XTC SDS MAX Drill Bits

Product Code	Drill Diameter (")	Working Length (")	Overall Length (")
TCMU16690	5/8"	22"	27"
TCMU16920	5/8"	29"	36"
TCMU18690	23/32"	22"	27"
TCMU18920	23/32"	29"	36"
TCMU20690	25/32"	22"	27"
TCMU20920	25/32"	29"	36"
TCMU22340	7/8"	8"	14"
TCMU22540	7/8"	16"	22"
TCMU24340	15/16"	8"	14"
TCMU24540	15/16"	16"	22"
TCMU24690	15/16"	22"	27"
TCMU25340	1"	8"	14"
TCMU25540	1"	16"	22"

Product Code	Drill Diameter (")	Working Length (")	Overall Length (")
TCMU26340	1-1/16"	8"	14"
TCMU26540	1-1/16"	16"	22"
TCMU28340	1-1/8"	8"	14"
TCMU28690	1-1/8"	22"	27"
TCMU28920	1-1/8"	29"	36"
TCMU30540	1-3/16"	16"	22"
TCMU32540	1-1/4"	16"	22"
TCMU35540	1-3/8"	16"	22"
TCMU36540	1-1/2"	16"	22"
TCMU36920	1-1/2"	29"	36"
TCMU38540	1-5/8"	16"	22"
TCMU40690	1-3/4"	22"	27"
TCMU40920	1-3/4"	29"	36"
TCMU42690	1-7/8"	22"	27"
TCMU42920	1-7/8"	29"	36"





SDS-Plus Chisels

Product Code	Description/Dimensions (")	Overall Length (")
TPPC12250	Pointed Ø1/2"x10"	10"
TPPC14250	Pointed Ø9/16"x10"	10"
TPFC20250	Flat Chisel 25/32"	10"
TPFC40250	Flat Chisel 1-9/16"	10"
TCPC22250	Concrete Chasing 7/8"	10"
TPAB40200	Angle Chisel 1-9/16"	8"



DRILLING

SDS MAX Chisels

Product Code	Description/Dimensions (")	Overall Length (")
TMPC18280	Pointed Ø23/32"x11"	11"
TMPC18400	Pointed Ø23/32"x16"	16"
TMFC24280	Flat Chisel 1"	11"
TMFC24400	Flat Chisel 1"	16"
TMFC50360	Flat Chisel 2"	14"
TMFC80300	Flat Chisel 3-1/4"	12"
TMFC115350	Flat Chisel 4-1/2"	14"
TCMC26300	Concrete Chasing Chisel 1"	12"
TMAB50300	Flat Chisel Crouched 2"	12"
THBH1645	Bush Hammer Head	11"



TESTING EQUIPMENT

KT-6 Tester Kit



"To easily verify the strength of post-installed anchor bolts on site, we have designed and developed the AT Series of non-destruction testing machines, which can fit various tests required for installing equipment, earthquake resistance, civil engineering work or other applications.

Easy maneuverability and simple fun equipment.

or managing on-site building

FEATURES:

- Light-weight, compact design applicable to various on-site tests
- **Easy operation enables** tension testing up to 6kn
- Measure and save tension and displacement value digitally
- Improve work efficiency significantly
- Power cord free

M2000 Pro Tester Kit



The Hydrajaws M2000 PRO Tester Kit anchor tester contains a universal set of adaptors enabling a comprehensive range of fixings and safety-critical applications, up to a maximum tensile load of 25kN (5620lbf) to be tested. Trusted by market-leading companies worldwide, the M2000 PRO Tester Kit anchor tester is an essential tool for carrying out testing procedures in line with BS 8539, BS 7883, and BS EN 795.

The M2000 PRO Tester Kit is easy to use and easily transported. It comes complete with a comprehensive full-colour user manual and backing and support from our technical team at Hydrajaws.

FEATURES:

- **0-25kN Dual Scale digit** with the latest Hydrajaws App (detachable for calibration, reduces carrier return costs).
- 2020 Load spreading bridge featuring height adjustable legs with pin arrangement in four positions with swivel feet giving 15mm of fine adjustment.
- Turning Handle with 22mm (7/8") integrated nut (for use in confined spaces).
- Up to 50mm of stroke.
- The anchor tester is preassembled and accessories can be quickly attached with ease.
- Hydrajaws gauge calibration certificate (valid for 12 months).
- Supplied in a robust protective carry case with full operating instructions.

M2000 Scaffold Tie Tester Kit



The Hydrajaws M2000 Scaffold Tie Tester Kit is a specific kit allowing Scaffolders to test all common scaffold anchors and fixings in general use today in line with NASC Guidance Note TG4:19. Manufactured to exacting high standards, the kit contains adaptors to test the most commonly used anchors used for scaffold ties up to a maximum tensile load of 25kN (5620lbf).

The three-legged load spreading bridge keeps reaction loads away from the fixing allowing results to be more consistent. Trusted by the best scaffolding companies in the world, the M2000 Scaffold Tie Tester Kit is an essential tool for any scaffolder wanting to comply with current health and safety practices.

FEATURES:

- **0-25kN Dual Scale digital gauge** compatible with the latest Hydrajaws App (detachable for calibration, reduces carrier return costs)
- 2020 Load spreading bridge featuring height adjustable legs with pin arrangement in four positions with swivel feet giving 15mm of fine adjustment.
- Turning Handle with 22mm (7/8") integrated nut (for use in confined spaces)
- Up to 50mm of stroke
- The tester is preassembled and accessories can be quickly attached with ease
- Hydrajaws gauge calibration certificate (valid for 12 months)
- Supplied in a robust protective carry case with full operating instructions.



M2050 Medium Heavy Tester Kit

Extending the testing range to cover 0-50kN, the Hydrajaws M2050 PRO Tester Kit enables engineers to validate the correct installation or establish the safe working loads of a comprehensive range of anchors & fixings in line with BS 8539 up to a maximum tensile load of 50kN (11240lbf).

Manufactured to exacting high standards, the Hydrajaws M2050 PRO Tester kit contains a universal set of adaptors allowing a wide range of anchors and fixings used in safety-critical applications to be tested. The three-legged load spreading bridge keeps reaction loads away from the fixing allowing results to be more consistent.

FEATURES:

- 0-50kN Dual Scale digital gauge compatible with the latest Hydrajaws App (detachable for calibration, reduces carrier return costs)
- 2050 Load spreading bridge featuring height adjustable legs with pin arrangement in six positions with swivel feet giving 30mm of fine adjustment.
- Turning Handle with 24mm integrated nut (for use in confined spaces)
- Up to 50mm of stroke
- The tester is preassembled and accessories can be quickly attached with ease
- Hydrajaws gauge calibration certificate (valid for 12 months)
- Supplied in a robust protective carry case with full operating instructions.



M2008 Heavy Duty Tester Kit

The portable self-contained M2008 Heavy Duty Tester meets the demand for proof load testing larger fixings up to 145kN (32597lbf). Applications include high load expanding and resin anchors, holding down bolts for stanchion base plates, base plate fixings for column lighting, anchorage for crash barrier and safety fences, anchorage for stadium crush barriers and bridge parapet anchors.

With optional extras, applications include rebar pull-out test, pad eye load test, large ringbolt, and eyebolt testing. Having a lightweight aluminium height adjustable load spreading bridge means the weight combined with the tester is only 14kg, which is lighter and more convenient to apply than a separate hydraulic pump and arrangement.

FEATURES:

- 0-145kN Dual Scale Digital Gauge compatible with the latest Hydrajaws App (detachable for calibration, reduces carrier return costs).
- 2008 lightweight aluminium off set triangular load-spreading bridge with nine height positions. The swivel feet offer fine height adjustment.
- Load application achieved via a 24mm ratchet handle driving a hydraulic multiplier.
- Spirit level to indicate the overall balance of the test rig.
- 10mm eyehook installed for attaching a lanyard as appropriate.
- The foam filler can accommodate four rebar adaptors.
- Hydrajaws gauge calibration certificate (valid for 12 months).
- Supplied in a wheeled robust carry case with telescopic handle and full operating instructions.



Kits Include below, other accessories available also.



TRUTEK - IPT GENERATION X

**21700 CELL
TECHNOLOGY**



**TWICE
THE POWER
TWICE THE
PERFORMANCE**

TRUTEK - IPT JOINT VENTURE DEVELOPING
NEW RANGE OF HIGH PERFORMANCE
BATTERIES IN 20V, 40V, & 58V.



Take our old battery (18650) , for example. Our standard 20V batteries can produce up to 800 watts of power output. When we upgraded to Generation X, it went up to 1440 watts—an 80% power increase!

It gives us the ability to produce cordless tools that we didn't think we'd ever see without a cord just a few years ago. And many of them are outperforming their corded counterparts now.

Power tools are hardly the end product, we plan to offer outdoor power equipment for lawn care and landscaping, battery-powered inverters, and high-powered construction equipment are all starting to have cordless options thanks to 21700 lithium-ion battery cells.



BATTERY HEALTH INDICATOR
LED LIGHT • QUICK RELEASE CHUCK



1/4" HEX CHUCK • LED LIGHT BATTERY HEALTH INDICATOR



1/2" SOCKET ADAPTER
LED LIGHT • BATTERY HEALTH INDICATOR



1/2" SOCKET ADAPTER
LED LIGHT • BATTERY HEALTH INDICATOR



HAMMER FUNCTION
LED LIGHT • NON-ROTATING HANDLE



Battery Capacity	Battery Full Charge Time	No Load Speed	Impact Rate	Impact Energy	Drilling Capacity	Optimum Drilling Capacity
5.Ah	60min	0-1,150 RPM	0-5,100IPM	2J	7/8" (Concrete)	3/8" (Concrete)



ROTARY HAMMER SDS PLUS 1"

HAMMER FUNCTION

LED LIGHT • NON-ROTATING HANDLE



Battery Capacity	Battery Full Charge Time	No Load Speed	Impact Rate	Impact Energy	Drilling Capacity	Optimum Drilling Capacity
5.Ah	60min	0-980RPM	0-4,350IPM	2.4J	1" (Concrete)	5/8" (Concrete)



ANGLE GRINDER 5"

ON/OFF LOCK SWITCH

EASY GRIP HANDLE • QUICK RELEASE BLADE



Battery Capacity	Battery Full Charge Time	No Load Speed	Disc Diameter	Spindle Thread
5.Ah	60min	0-7,500 RPM	4" / 4 - 1/2" / 5"	M14



CIRCULAR SAW 7-1/4"

BLADE GUARD

FRONT BEWEL • DEPTH ADJUSTER



Battery Capacity	Battery Full Charge Time	No Load Speed	Saw Blade Diameter	Cutting Capacity
5.Ah	60min	0-5000 RPM	7 - 1/4"	2 - 5/8" at 90 1 - 3/4" at 45



MULTI TOOL

QUICK BLADE RELEASE • NON~SLIP,

SOFT GRIP HANDLE • SPEED ADJUSTMENT



Battery Capacity	Battery Full Charge Time	No Load Speed	Stroke Length	Maximum Cutting Capacity
5.Ah	60min	0-3,000SPM	1- 1/8 "	6"



COLLATED SCREWDRIVER

EASILY ADJUSTABLE SCREW DEPTH

EXTRA STABILITY • QUICK CHANGE SYSTEM



Battery Capacity	Battery Full Charge Time	No Load Speed	Screw Length	Screw Dia Capacity
5.Ah	60min	0-5,000SPM	3/4" - 2-1/2"	5/32"



LED LIGHTS

SINGLE/DOUBLE
ULTRA LED • HANDHELD



Battery
Capacity

5.Ah

Battery Full
Charge Time

60min

Maximum
Output

(1) 1,250Lm / High: 2,500Lm | (2) 1,250Lm / Hi
(3) 1,250Lm / High: 2,500Lm | (4) 500Lm / High: 1,000Lm

RADIO

STEREO SPEAKERS • BLUETOOTH V5.0
USB CHARGING PORT



Voltage

AC: 220-240V
DC: 20V

Frequency

50/ 60HZ

Output
Power

16W6.5Kn

DAB

174-240 MHZ

FM


87.5 - 108 MHZ

Bluetooth

V 5.0

BLOCK TOOL CASES / BOXES

TRANSPORTATION &
STORAGE OF HEAVY TOOLS

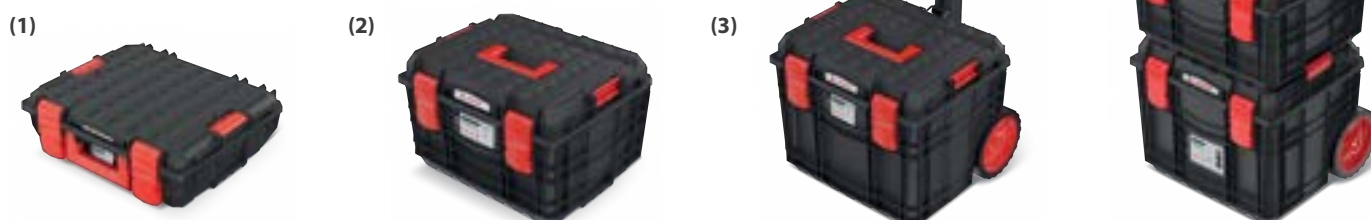

Box Size mm
WxDxH

(1) 18 x 15 x 5-1/2 (")
(2) 18 x 15 x 11 (")
(3) 18 x 15 x 15 (")

Pieces Per
Palette

(1) 68 pcs
(2) 32 pcs
(3) 16 pcs

Palette
Dimension

(1) 75 (")
(2) 73 (")
(3) 65 (")

Box
Colour

S411

With
Foam

Yes

TRUTEK BRANDING

BRANDING



Trutek offers a wide range of POS material to maximise branding and potential sales, wherever the requirement. A complete SOLUTION.

HIGH END PACKAGING

Trutek's new branded packaging emphasises the quality and reliability of its products. Strong presence and clear product selection is the RESULT.







TRUTEKTM
CONSTRUCTION FASTENING SYSTEMS

USA OFFICE

270 17th Street,
The Atlantic Building,
Atlanta,
30363

GLOBAL HEAD OFFICE

Trutek Fastening Systems UK Ltd
Unit 6, New Hall Hey Industrial Estate
New Hall Hey Road
Rawtenstall
Lancashire
BB4 6HL
United Kingdom

Email: Sales@trutekfixings.co.uk

tel: +44 (0) 1706 614105

www.trutekfasteners.eu

